


DS-2CE15A2P(N)-IRP


700 TVL DIS IR Bullet Camera

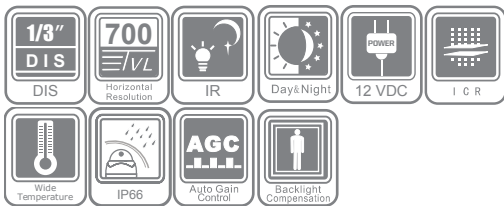

Key features

- 700 TVL Horizontal Resolution
- True Day/Night
- 2.8/3.6/6mm Fixed Lens, 0.1 lux /F1.2
- 20m IR Distance
- Wide Operating Temperature Range:
-40°C to 60°C(-40°F to +140°F)

Dimensions

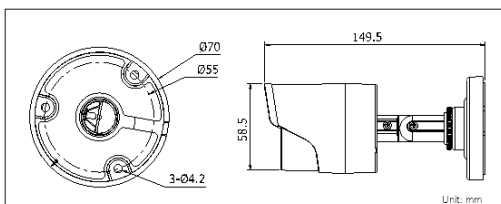

DS-2CE15A2P(N)-IRP	
Camera	
Image Sensor	1/3" DIS
Signal System	PAL/NTSC
Effective Pixels	976 (H) x 496 (V)
Min. Illumination	0.1 Lux @ (F1.2,AGC ON), 0 Lux with IR
Shutter speed	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s
Lens	3.6 mm (2.8mm,6 mm optional)
	Angle of view: 68.4° (3.6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & Night	IR cut filter with auto switch
Horizontal Resolution	700 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 52 dB
General	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC
Power Consumption	Max. 1.8 W (Max. 4 W with IR cut filter on)
Ingress Protection	IP66
IR Range	20 meters
Dimensions	Φ70x149.5 mm (Φ2.76" x5.89")
Weight	300 g (0.66 lbs)

Available models

PAL: DS-2CE15A2P-IRP
NTSC: DS-2CE15A2N-IRP